

Sonnenschein SOLAR

The compact alternative for smaller solar applications

Sonnenschein SOLAR batteries are specially designed for small to medium performance requirements in leisure and consumer applications. The advantages of the maintenance free VRLA-batteries are enhanced by the worldwide excellent reputation and technical image of the dryfit technology.

Your benefit:

- > **Excellent cycling performance** – 800 cycles at 60% Depth of Discharge C_{10} (at 20 °C)
- > **dryfit Gel technology** – leak proof
- > **Lowest energy consumption** – saving costs
- > **Robust design** – resilient in harsh conditions
- > **Proof against deep discharge** – greater long-term energy delivery
- > **Completely recyclable** – low CO₂-footprint



Specifications


- > Nominal capacity 6.60 – 230 Ah C_{100} (20 °C)
- > Long shelf life up to 2 years at 20 °C without recharge due to the very low self discharge rate
- > Designed in accordance with IEC 61427 and IEC 60896-21/22
- > Manufactured in Europe in our ISO 9001 certified production plants
- > Trouble-free transport of operational blocks, no restrictions for rail, road, sea and air transportation (IATA, DGR, clause A67)
- > Approval: UL (Underwriter Laboratories)



Nominal capacity 6.60 – 230 Ah C_{100}



Block battery




Grid plate



Recyclable




Valve regulated lead-acid batteries



Proof against deep discharge



Maintenance-free (no topping up)



800 cycles at 60% DoD C_{10}

Sonnenschein SOLAR

Technical Data


Technical characteristics and data

Type	Part number	Nom. voltage V	Nominal capacity C_{100} 1.80 Vpc 20 °C Ah	Discharge current I_{100} A	Length (l) max. mm	Width (b/w) max. mm	Height up to top of cover (h1) max. mm	Height including connectors (h2) max. mm	Weight approx. kg	Terminal	Terminal position
S12/6.6 S	NGS01206D6HS0SA	12	6.60	0.06	152	65.5	94.5	98.4	2.60	S-4.8	3
S12/17 G5	NGS0120017HS0BA	12	17.0	0.17	181	76.0	-	167	6.10	G-M5	1
S12/27 G5	NGS0120027HS0BA	12	27.0	0.27	167	176	-	126	9.60	G-M5	1
S12/32 G6	NGS0120032HS0BA	12	32.0	0.32	197	132	160	184	11.1	G-M6	2
S12/41 A	NGS0120041HS0CA	12	41.0	0.41	210	175	-	175	14.6	A-Terminal	1
S12/60 A	NGS0120060HS0CA	12	60.0	0.60	261	136	208	230	19.0	A-Terminal	1
S12/85 A	NGS0120085HS0CA	12	85.0	0.85	353	175	-	190	26.8	A-Terminal	1
S12/90 A	NGS0120090HS0CA	12	90.0	0.90	330	171	213	236	30.0	A-Terminal	2
S12/130 A	NGS0120130HS0CA	12	130	1.30	286	269	208	230	39.0	A-Terminal	4
S12/230 A	NGS0120230HS0CA	12	230	2.30	518	274	216	238	67.0	A-Terminal	3

Capacities $C_1 - C_{100}$ (20 °C)

Type	C_1 1.70 Vpc	C_5 1.70 Vpc	C_{10} 1.70 Vpc	C_{20} 1.75 Vpc	C_{100} 1.80 Vpc
S12/6.6 S	2.90	4.60	5.10	5.70	6.60
S12/17 G5	9.30	12.6	14.3	15.0	17.0
S12/27 G5	15.0	22.1	23.5	24.0	27.0
S12/32 G6	16.9	24.4	27.0	28.0	32.0
S12/41 A	21.0	30.6	34.0	38.0	41.0
S12/60 A	30.0	42.5	47.5	50.0	60.0
S12/85 A	55.0	68.5	74.0	76.0	85.0
S12/90 A	50.5	72.0	78.0	84.0	90.0
S12/130 A	66.0	93.5	104	110	130
S12/230 A	120	170	190	200	230

Drawings with terminal position, terminal and torque

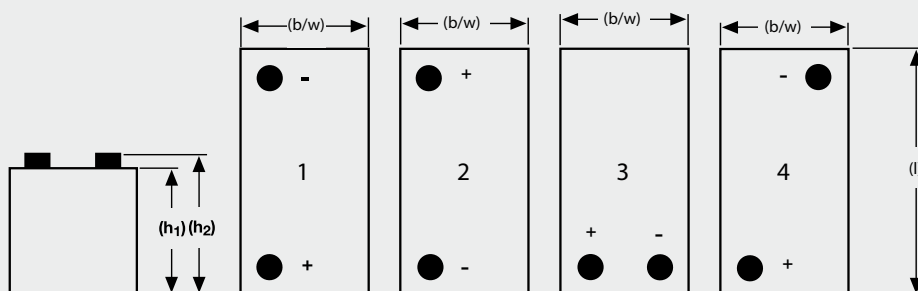

Not to scale!

